



Bruce®

ArmstrongFlooring®




ROBBINS®



HARDWOOD INSTALLATION PRODUCTS

What The Pro's Use

Trust AHF and our family of brands to give your home a beautiful, lasting foundation. Our premium adhesives, installation materials and cleaners are designed to work perfectly with our hardwood flooring, delivering professional results and extra warranty protection when you use the recommended adhesive.

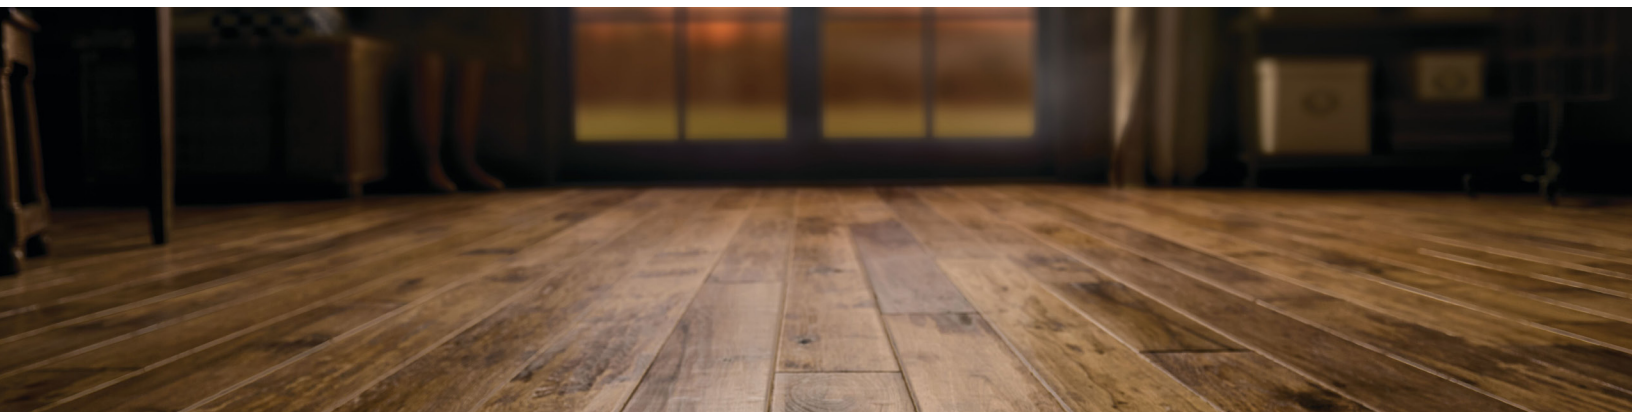

Maximize Your Warranty

When you choose the recommended AHF adhesive, you unlock upgraded warranty protection on your new floor. Lifetime and 50-year warranties become transferable if you sell your home, and all other warranty terms are extended by an additional 10 years for added peace of mind.

Hardwood Adhesives

Summit™ Select Adhesive

- Hard-set elastomeric adhesive
- Unlimited moisture protection
- 100% RH; no moisture or pH testing
- Permanent, waterproof bond
- Non-staining and easy to clean
- STC 62; IIC 68
- 4-Gal (BRUCE-SSELECT-4)



Proconnect™ Plus Adhesive

- Hard-set elastomeric adhesive
- Permanent, waterproof bond
- Non-staining and easy to clean
- One step installation
- Can be used over cutback residue
- 4-Gal (PROCONNECTPLUS)



Equalizer™ Pro Adhesive

- Moisture-cured urethane adhesive
- Moderate moisture tolerance
- High-strength, waterproof bond
- Strong, elastomeric bond with fast grab
- Non-slumping formula
- 4-Gal (BRUCEEP-4.0)




Everseal™ Adhesive

- Floating floor tongue & groove adhesive
- Strong, elastomeric bond with fast grab
- Creates water-resistant joints/seams & edges/ends
- Resists moisture and mold
- Easy installation, clean up and non-etching
- 16 oz Bottle 12/ctn (BRUCE-EVSEAL-16)



Glue Assist Adhesive

- Floating floor tongue & groove adhesive
- Reduces friction squeaks from nail or staple installations
- Wet-set, early grab, fast curing
- High-strength elastomeric bond
- Non-staining and easy to clean
- 30 oz Bottle 12/ctn (BRUCE-GAPRO-30)

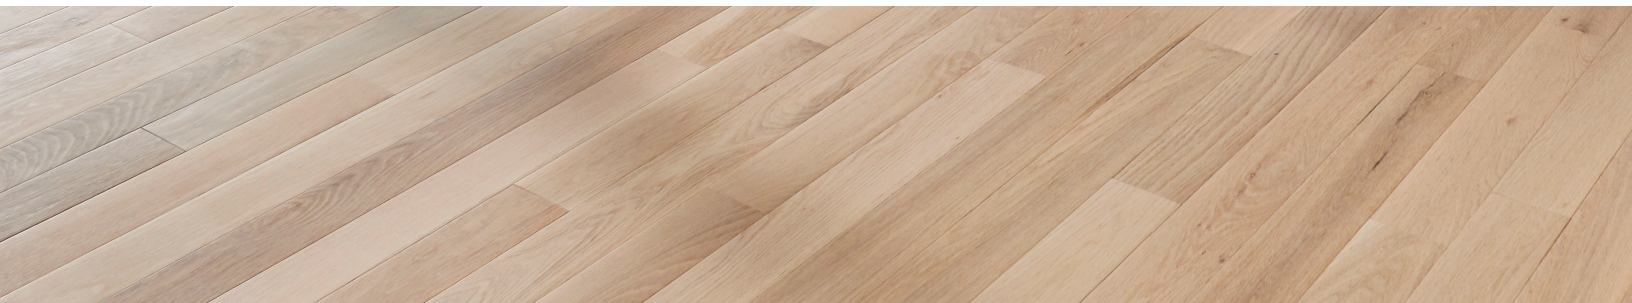

No matter which AHF flooring brand you choose, our adhesive products are designed to work seamlessly across the family — different names, same trusted performance that brings your floors together beautifully.

Subfloor Preparation Products

S-462 Seal Strong™

- Two-part moisture mitigation system
- Creates moisture barrier between concrete & flooring
- Can be applied over S-466 Patch Strong
- Suitable up to 100% RH (or 25 lbs CaCl)
- Only one coat to fully seal concrete
- Working Time: approximately 20 minutes
- Cure Time: minimum 4 hours
- Coverage: 250-270 sq. ft./unit 10 mils thick
- Use Notched squeegee & short nap roller
- 2.5 gal 2-part (00462101)



S-463 Level Strong™

- Self-leveling underlayment works quickly
- Compressive strength of 5300 psi at 28 days
- Flexural strength of 1,000 psi at 28 days
- Use up to 1-1/2 in. thick on porous substrates & up to 1/2 in. thick on non-porous substrates
- Ready for foot traffic in 2-3 hours
- Flow Time: 10 minutes
- Coverage: 52-56 sq. ft. per bag at 1/8 in. thick
- Trowel: smooth edge
- 55 lb bag (00463500)



S-464 Prime Strong™ Porous

- Acrylic primer for porous substrates
- Aids in strengthening adhesive bond
- Helps to reduce subfloor absorbency
- Can be used over S-463 Level Strong
- Drying Time: minimum 30 minutes
- Coverage: 400-600 sq. ft./gallon diluted 1:1
- Use soft bristle push broom, paintbrush or brush
- 2.6-Gal (00464108)



S-465 Prime Strong™ Non-Porous

- Solvent-free, two-component primer
- Can be used over S-462 Seal Strong and other non-porous substrates
- Drying Time: approximately 3 hours
- Coverage: 400-600 sq. ft. per gallon
- Use short nap roller, sponge paint roller or foam squeegee
- 1-Gal (00465106, two 1/2 Gal tubs)



S-466 Patch Strong™

- High-performance patch & smoothing compound
- Easy to apply and achieve a featheredge finish
- Exceptional strength
- No RH limit for use over concrete
- Use over S-462 Seal Strong after application of S-465 Prime Strong non-porous
- Pot Life: 15-20 minutes
- Dry Time: 20 minutes as a skim coat
- Coverage: 200-250 sq. ft. per bag as a skim coat (28 sq. ft. per bag at 1/8 in. thick)
- Trowel: smooth edge
- 10 lb bag (00466100)



S-1840 Quiet Comfort™ Luxury Flooring Underlayment

- Use with LVT, Engineered Stone and Hardwood
- Excellent acoustic barrier for through-the-floor and in-room footfall noise reduction
- Cross-linked polypropylene provides moisture barrier which resists mold and mildew
- 6 ft. wide x 50 ft. long; 6 lbs./roll
- STC 62; IIC: 64
- Roll 300 sq. ft. (01840101)



Floor Care & Maintenance

Keeping It Clean

Life happens—spills, scuffs, and everyday messes. Keep your floor looking its best with AHF Cleaners, the trusted choice to restore the rich, lasting shine you will love.

Hardwood & Laminate Floor Cleaner

- Ready to use; no need to dilute
- No rinse; No residue
- Fast drying
- Safely cleans
- pH of 7
- Shelf life = 2 years
- Qt. spray
 - WS109 20/ctn
 - WS109C 20/ctn foil seal
 - WS109S 12/ctn
 - WS109T 6/ctn



Hardwood & Laminate Floor Cleaner Refill

- Ready to use; no need to dilute
- No rinse; No residue
- Fast drying
- Safely cleans
- pH of 7
- Shelf life = 2 Years
- 1/2 Gal. Refill
 - WS109R 4/ctn
 - WS109RT 12/ctn



For An Ideal Installation

- Select the correct AHF adhesive, subfloor preparation products, and floor care products that are right for your project.
- Prepare the subfloor and ensure the substrate is clean, dry, and level.
- Apply the adhesive using a specified applicator and follow the open and working times for the best performance.
- Clean floor periodically with AHF approved maintenance products.

Residential Hardwood Adhesive Summary

Adhesive	RH Limit	pH Limit	MVER Limit	Spread Rate	Open Time	Working Time	Cure Time	Traffic Time		Shelf Life
								Low	High	
Summit Select	100%	14	-	50-70 sq. ft. / Gal. (20-30 as moisture barrier)	0	45 Min	12 Hrs	6 Hrs	6 Hrs	18 Months
Proconnect Plus	90%	14	10 lbs	50-70 sq. ft. / Gal. (20-30 as moisture barrier)	0	45-60 Min	12 Hrs	6 Hrs	6 Hrs	18 Months
Equalizer Pro	75%	5 - 9	5 lbs	50-70 sq. ft. / Gal.	10 Min	45-60 Min	24 Hrs	4 Hrs	12 Hrs	18 Months
Everseal	-	-	-	400 lin ft. / bottle	0	30-40 Min	24 Hrs	12 Hrs	24 Hrs	18 Months
Glue Assist	-	-	-	-	0	45 Min	12 Hrs	12 Hrs	12 Hrs	18 Months



Visit FloorExpert.com

For SDS or complete product, technical, installation, maintenance, and warranty details

WF-1464-126

© 2026 AHF, LLC. All trademarks are owned by AHF, LLC.



Bruce

ArmstrongFlooring



ROBBINS